


SK-102-FSR-461-M

DATE	CHANGES	INTL	REV
03.29.12	Original	TH	1.0
08.11.17	Corrected outside dimensions	AH	1.1
04.01.25	Mounting is VESA, iKey Logo on spacebar	AD	1.2

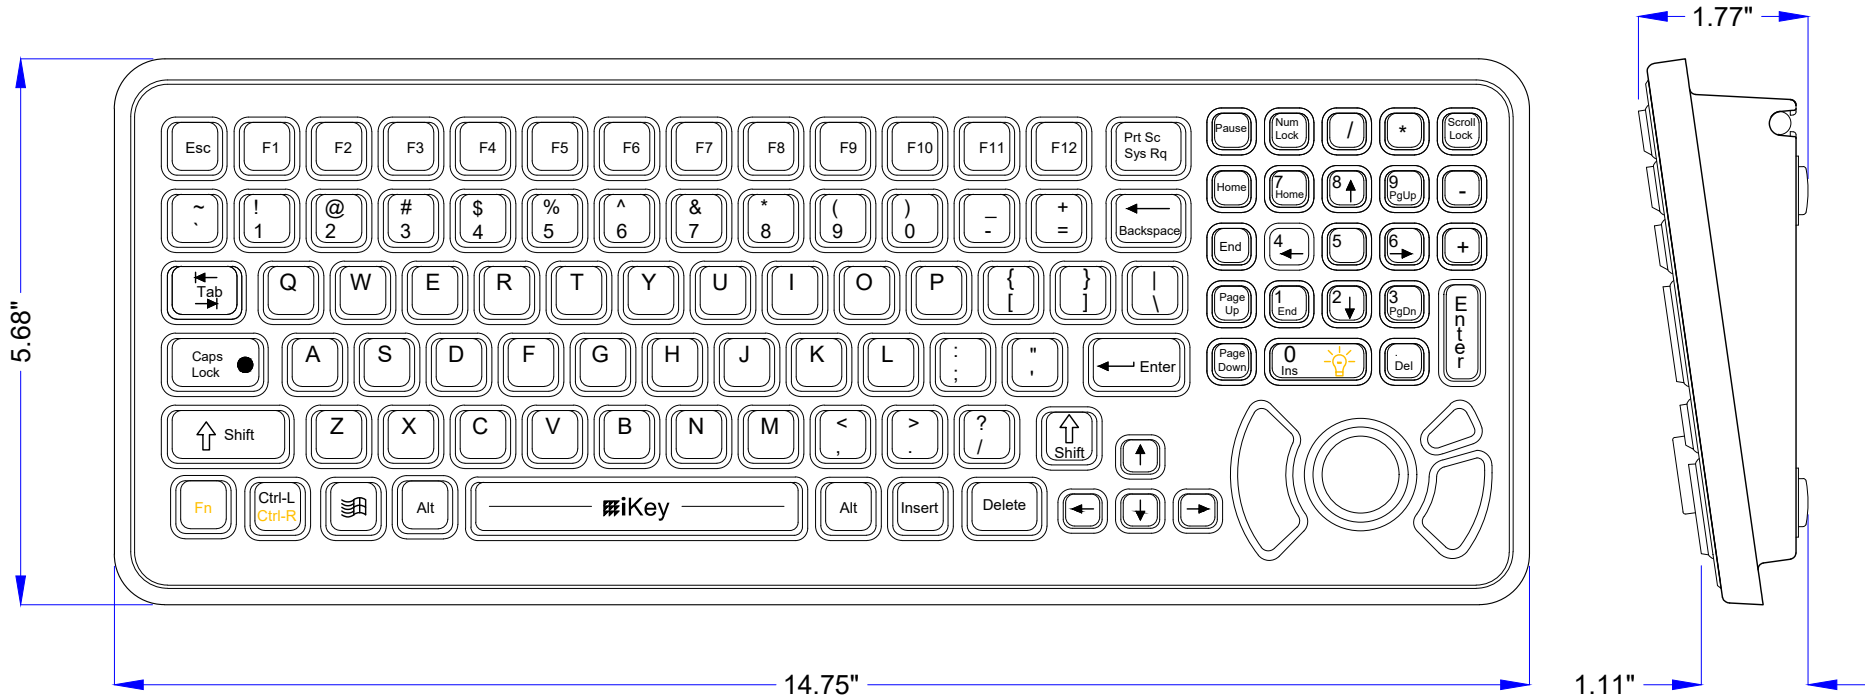

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 85mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT


2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey , Ltd. 2621 Ridgepoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	©2025 iKey, Ltd.		Part Number: SK-102-FSR-461-M	Drawing Number: MKT0317	Sheet: 1 OF 2	
			Drawing Title: SK-102-FSR-461-M-MKT	Revision: 1.2	Date: 04.01.25	ADD

SK-102-FSR-461-M BACK/MOUNTING

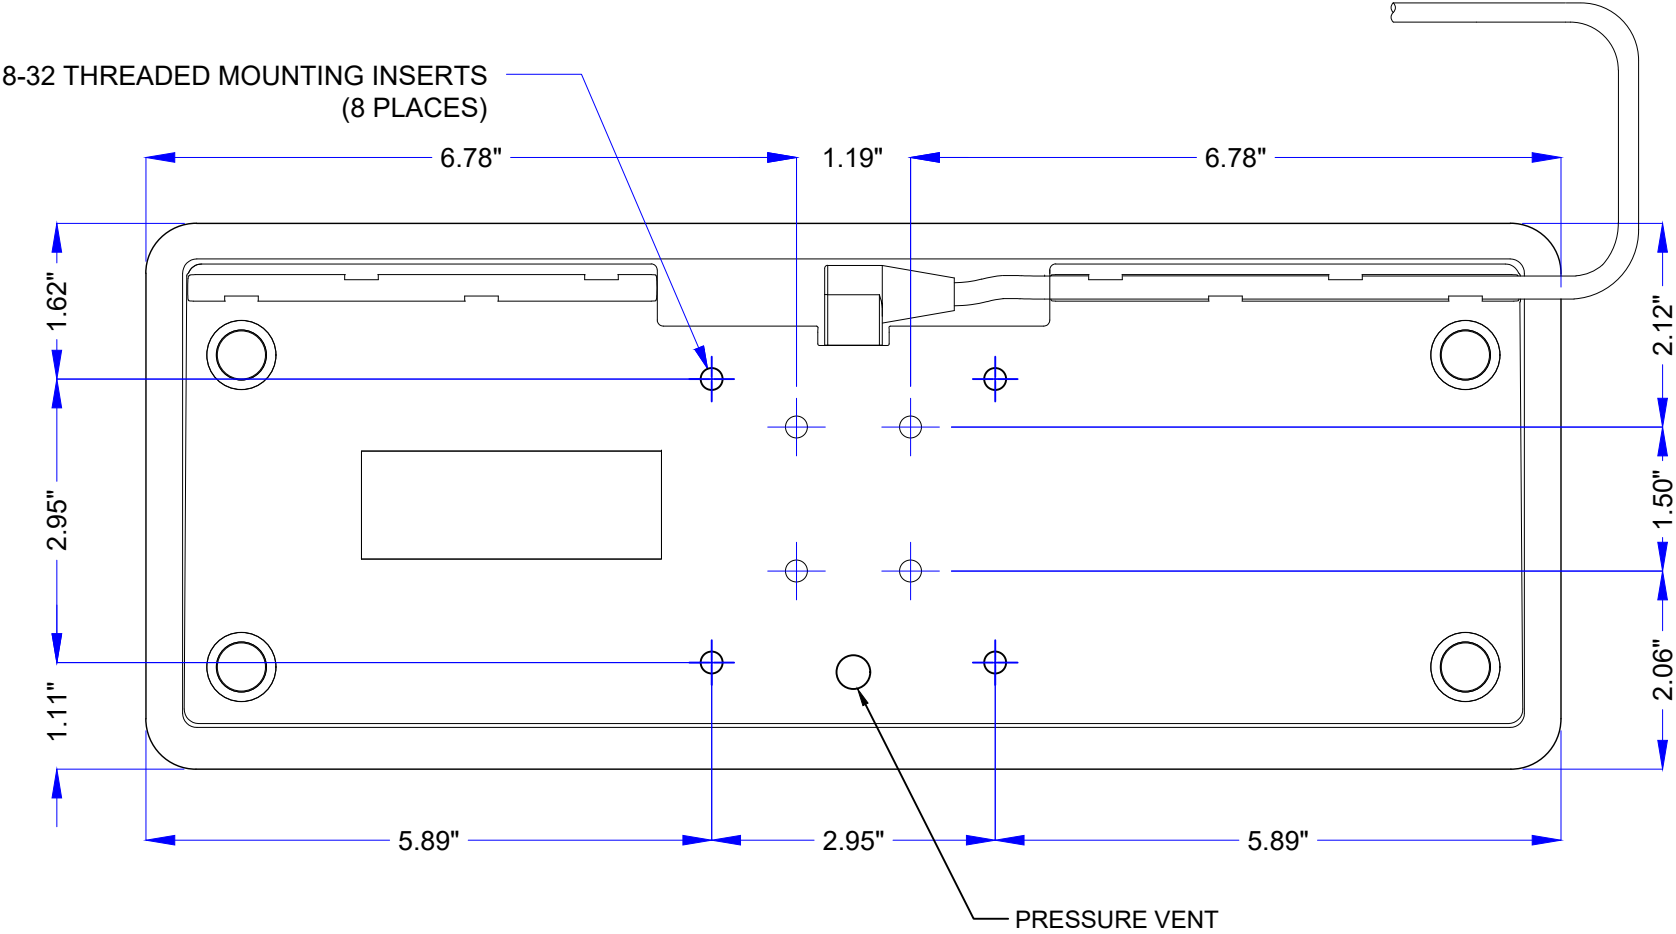

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey , Ltd. 2621 Ridgepoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	©2025 iKey, Ltd.	Part Number: SK-102-FSR-461-M	Drawing Number: MKT0317	Sheet: 2 OF 2	
		Drawing Title: SK-102-FSR-461-M-MKT	Revision: 1.2	Date: 04.01.25	ADD