


SK-102-FSR-M

DATE	CHANGES	INTL	REV
07.14.16	Original	AH	1.0
10.10.17	Corrected outer dimensions	AH	1.1
10.04.18	Corrected cable version	AH	1.2
04.02.25	VESA Mounting and iKey logo on spacebar	AD	1.3

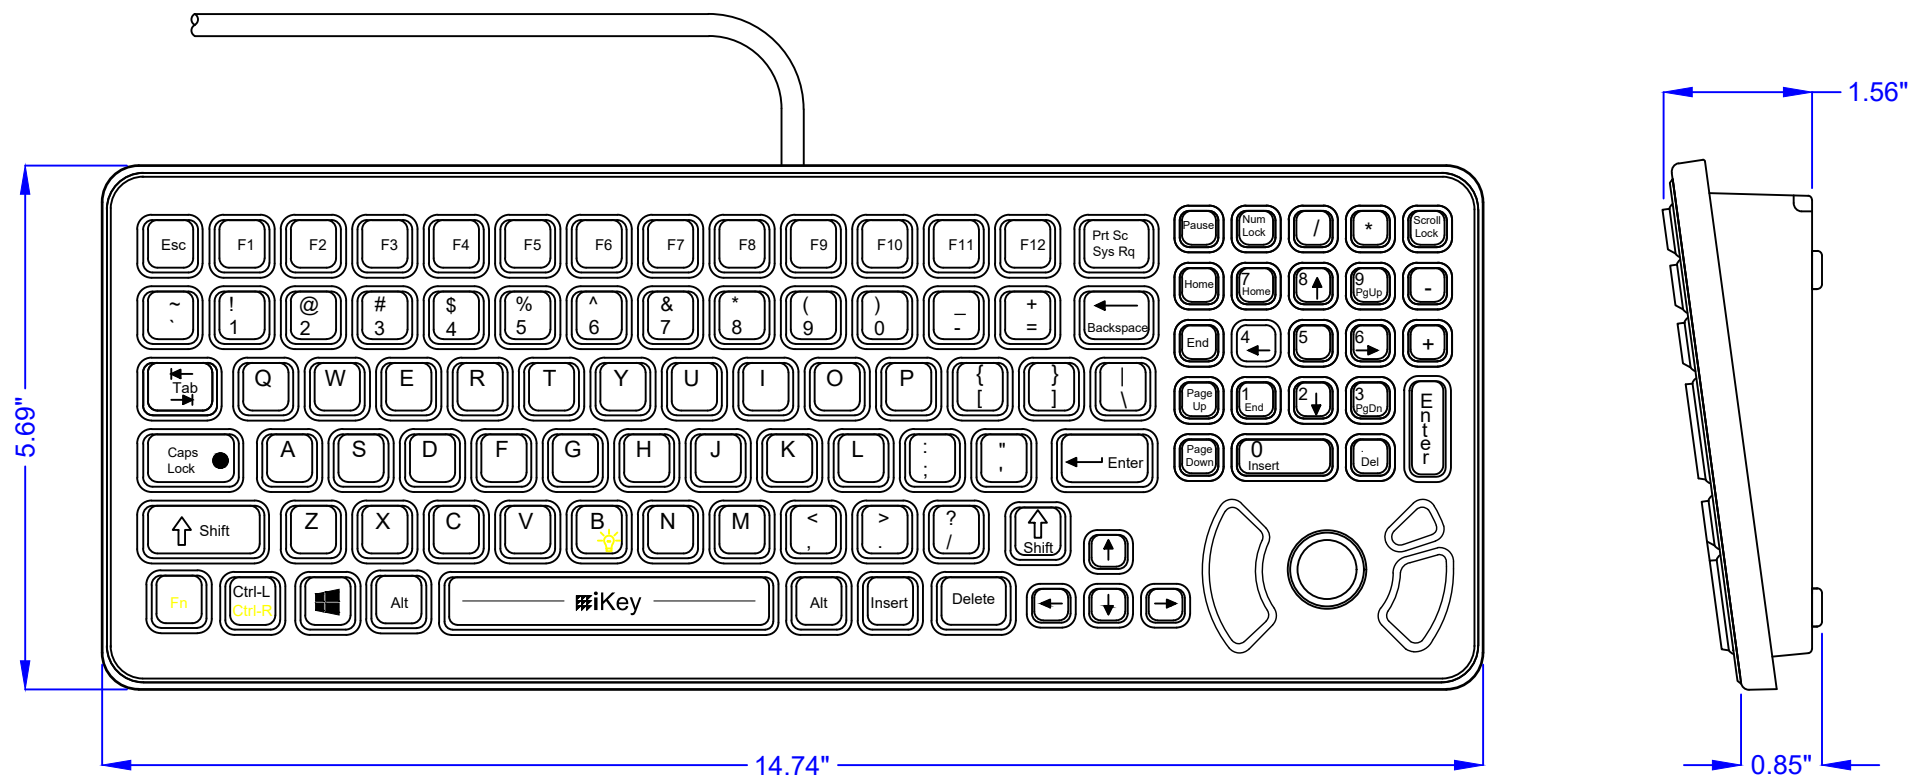

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
 KEYBOARD: 200mA@5V (from Keyboard port)
 POINTER: 35mA@5V (from Mouse port)
 USB: 235mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2025 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SK-102-FSR-M

Drawing Title: SK-102-FSR-M-MKT

Drawing Number: MKT0390


Revision: 1.3

Sheet: 1 OF 2

Date: 04.02.25

ADD

SLK-102-FSR-M BACK/MOUNTING

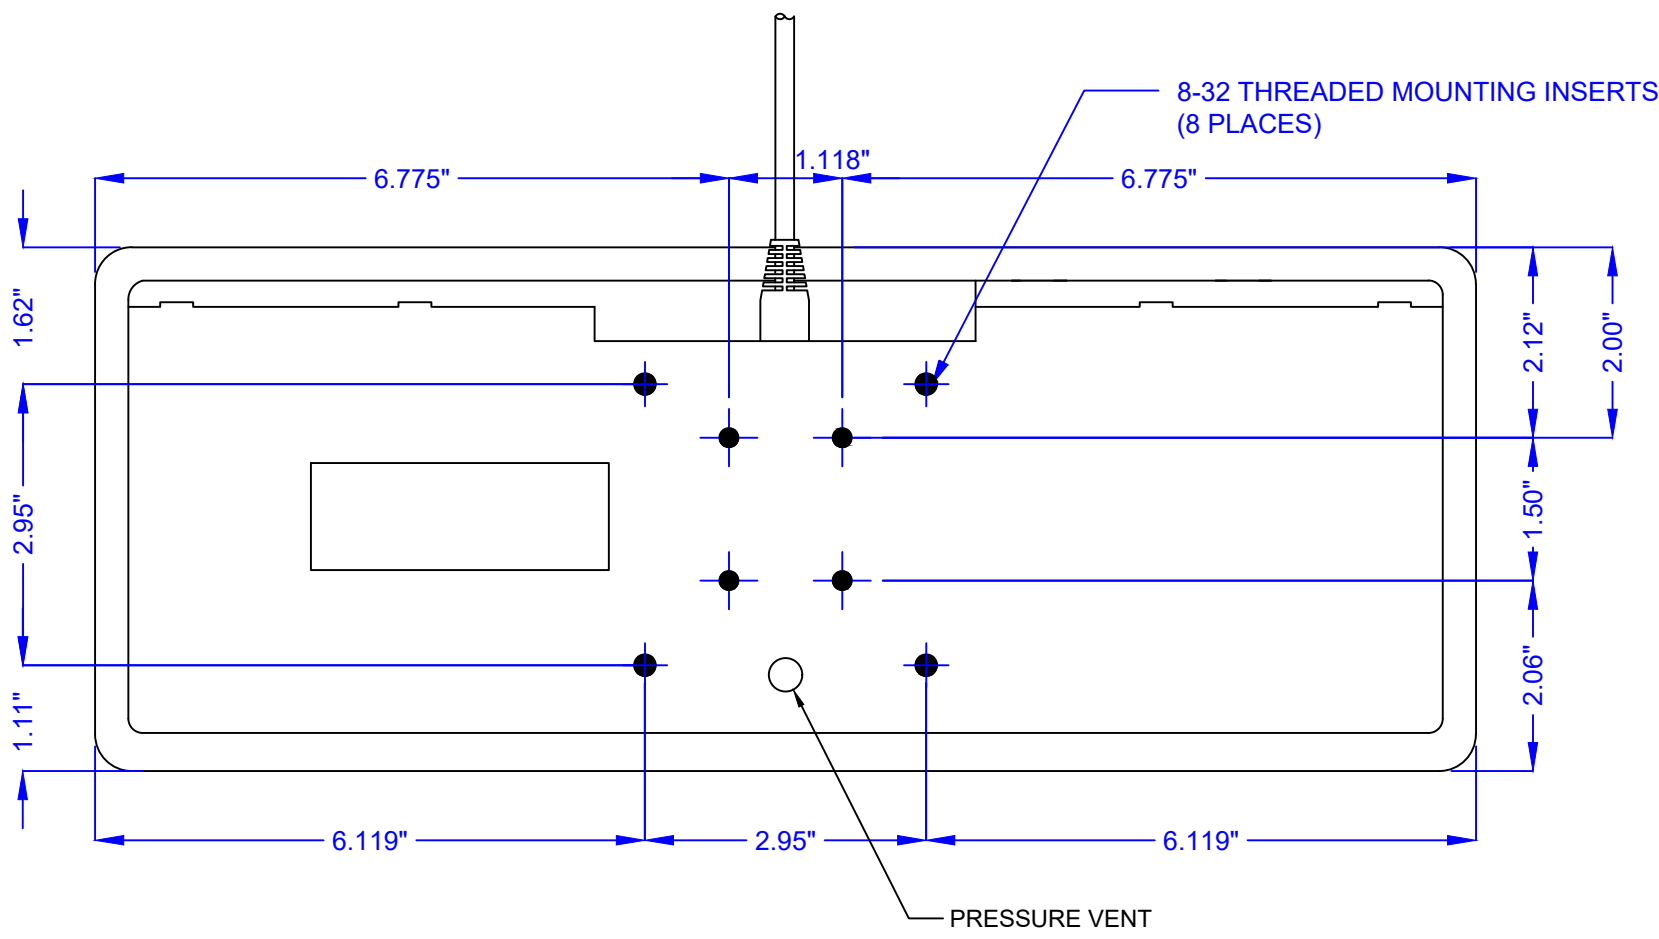

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey , Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	©2025 iKey, Ltd.		Part Number: SK-102-FSR-M	Drawing Number: MKT0390	Sheet: 2 OF 2	
	Drawing Title: SK-102-FSR-M-MKT		Revision: 1.3	Date: 04.02.25	ADD	