


# SLK-101-M

DATE	CHANGES	INTL	REV
09.10.08	Original	JB	1.0
11.08.11	Updated dimensions	TH	1.1
04.02.25	VESA Mounting & iKey Logo on spacebar	AD	1.2

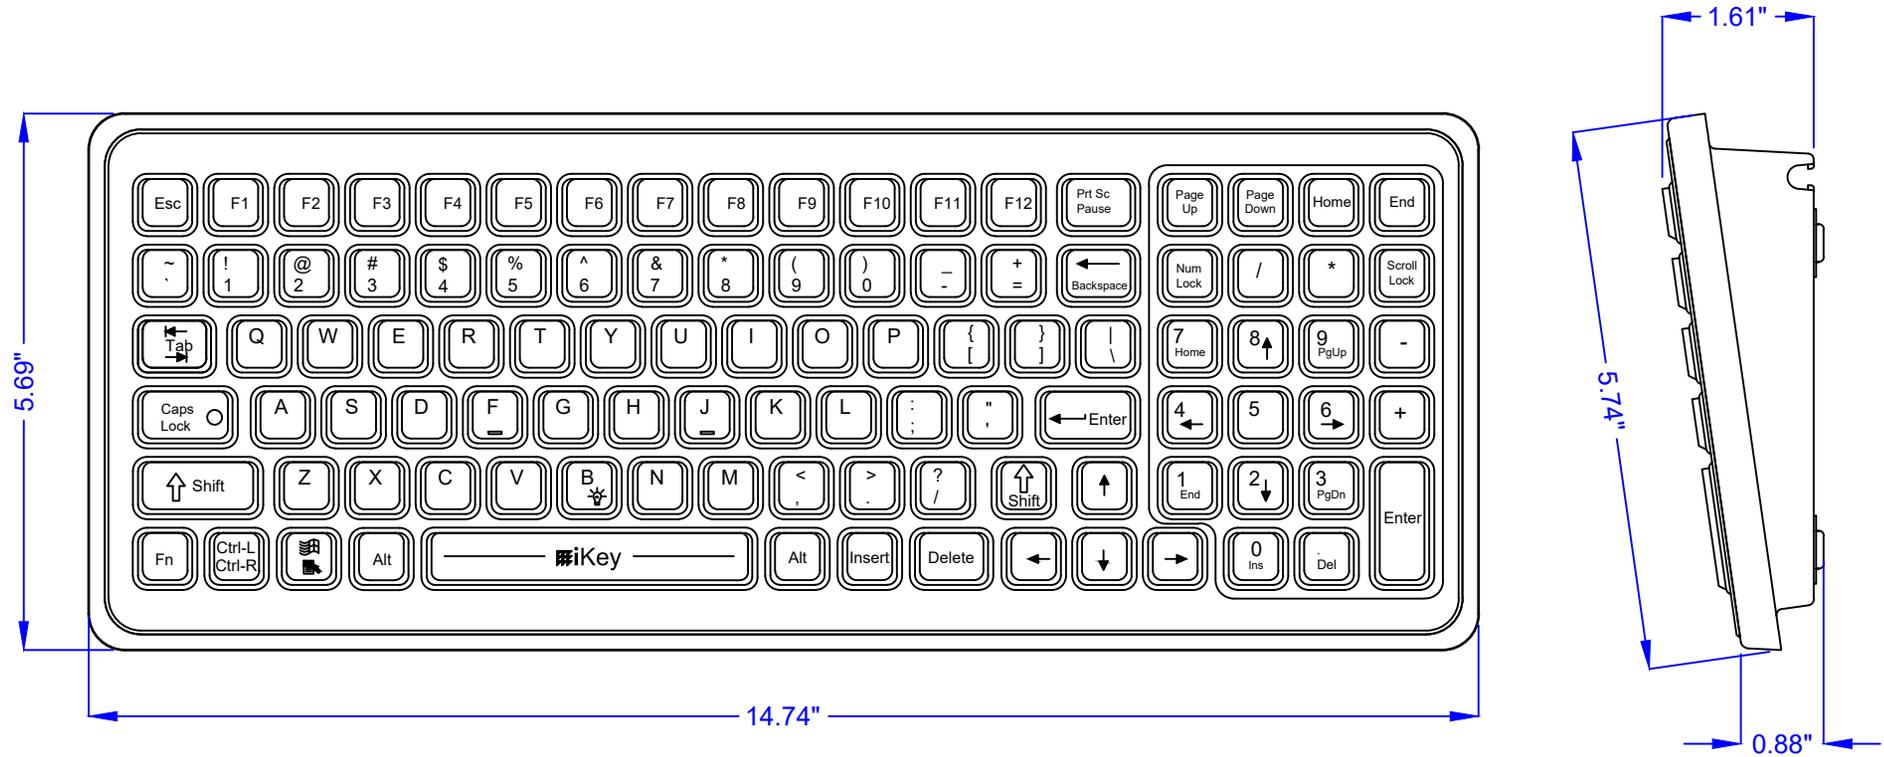

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2: 210mA@5V (from Keyboard port)  
 USB: 210mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754


©2025 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: SLK-101-M  
 Drawing Title: SLK-101-M-MKT

Drawing Number: MKT0145  
 Revision: 1.2

Sheet: 1 OF 2  
 Date: 04.02.25  
 ADD

# SLK-101-M BACK/MOUNTING

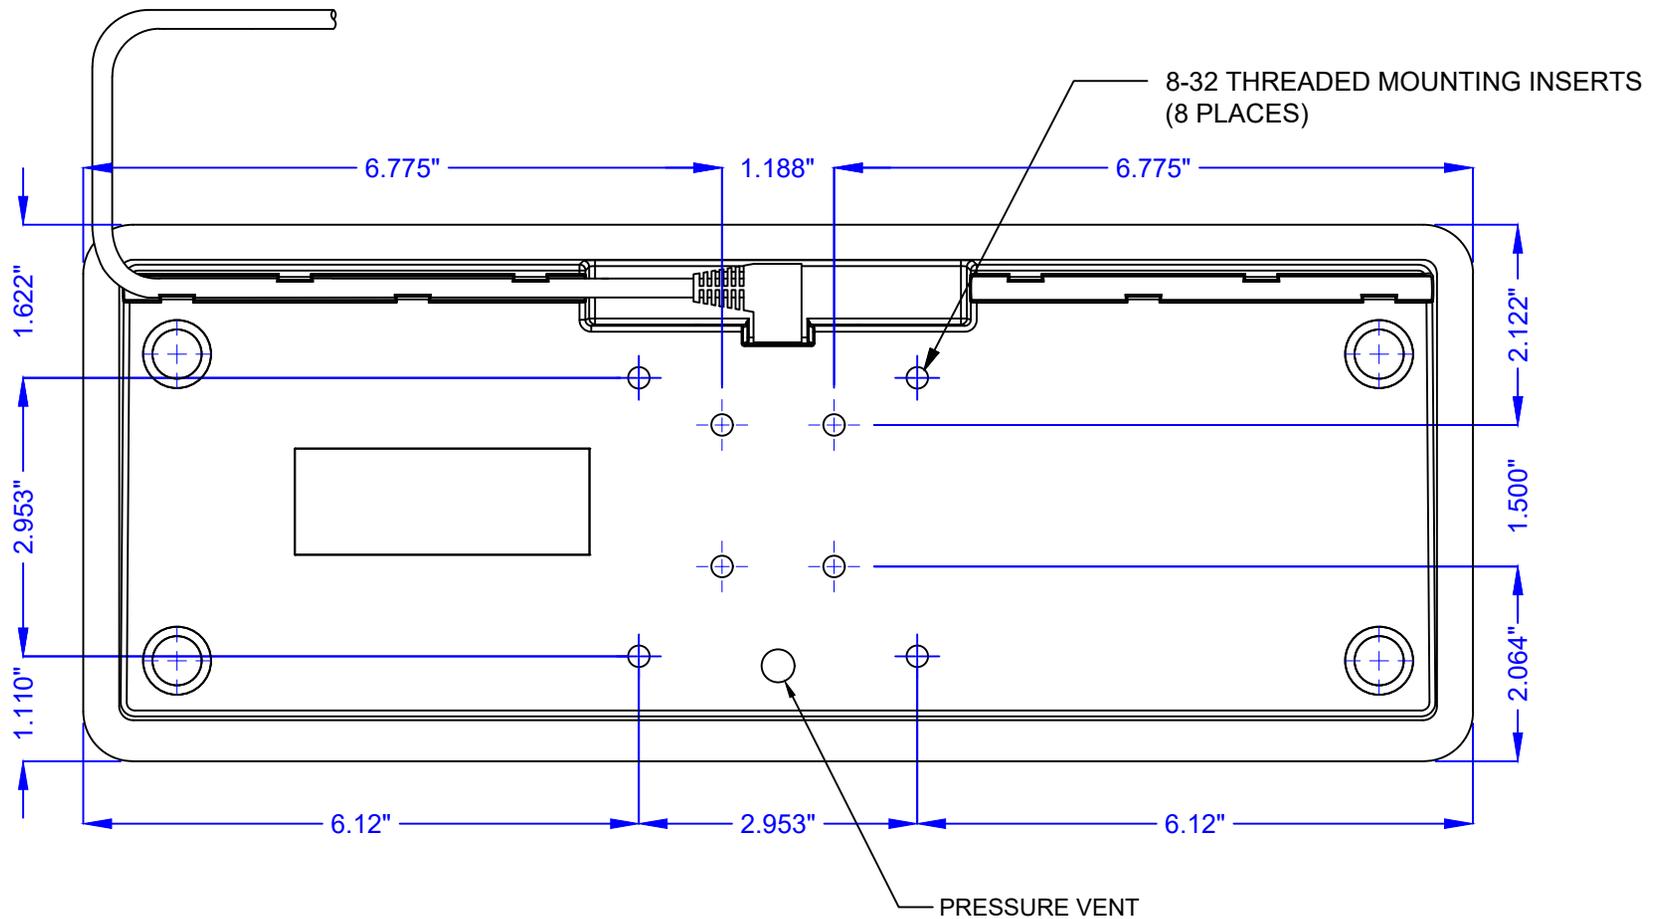

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgepoint Dr. Suite 235  
Austin, Texas 78754

©2025 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SLK-101-M  
Drawing Title: SLK-101-M-MKT

Drawing Number: MKT0145  
Revision: 1.2

Sheet: 2 OF 2  
Date: 04.02.25

ADD